## DADO SINGLE ROUND

8.04

FOUNTAINS

#DDR1 / DADO SINGLE ROUND



that can be supplied in either a disabled access configuration, or a space saving compact size. Both models are supplied complete with a front push, timed flow bubbler, splashback panel, waste outlet and mounting bracket. Manufactured from commercial grade 304 stainless steel. Refrigerated models are supplied with a separate remote chiller unit for installation within wall cavity. Britex CoastGuard<sup>™</sup> - a clear coating option that protects against the onset of tea staining (surface discolouration) caused by salt air - is recommended for installations near the ocean.



BRITEX S.S. Dado Single Round Drinking Fountain - Compact/Disabled model. Backing panel to be 500L x 620H. Supplied complete with 40mm waste outlet, front push button activated bubbler. AS1428 compliant - Product Code DDR1-X

\*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE Britex Place, Mirra Crt Bundoora VIC 3083 t (03) 9466 9000 f (03) 9466 9044

**SYDNEY** 16 Northumberland Drv Taren Point NSW 2229 t (02) 9531 2100 f (02) 9531 2800

 Y
 PERTH

 vrv
 Unit 1/8 Principal Link

 29
 Malaga WA 6090

 00
 t (08) 9249 5464


 00
 f (08) 9248 6893

BRISBANE 19 Manilla St East Brisbane QLD 4169 t (07) 3363 2400 f (07) 3363 2444


britex.com.au | info@britex.com.au | A.B.N 83 004 309 737

## DADO SINGLE ROUND



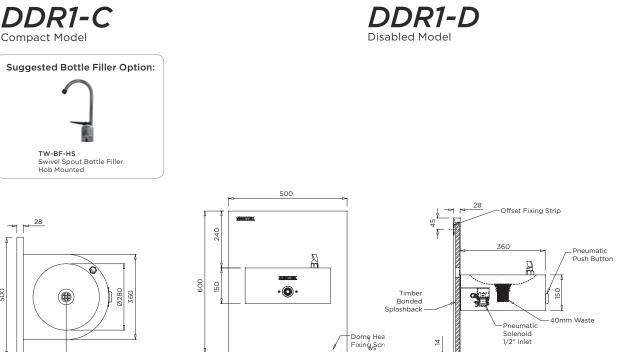

## MODEL DDR1-C Plan, Front Elevation and Side Elevation

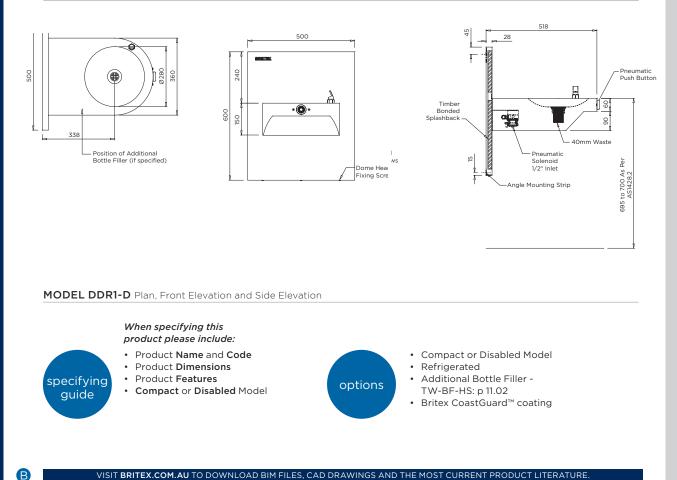

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

4

Ā

Angle Mounting Strip



500

208

8.04